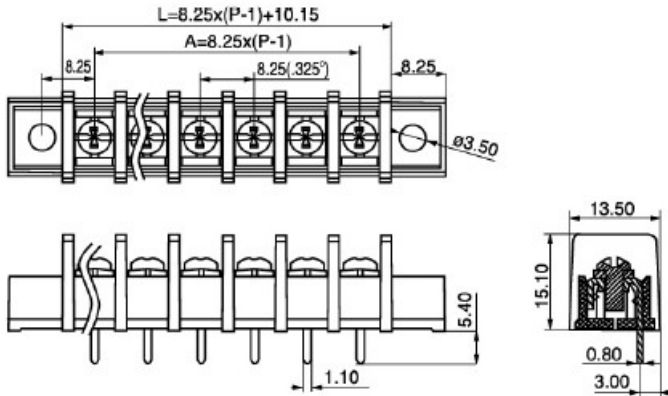


型 号 Model	BU8. 255F/HR
间 距 Pitch	8.255mm
认 证 Approval	
产品规格 Specification	
绝缘外壳 Housing	PBT UL94 V-0
端 子 Terminal	黄铜、镀锡
螺 钉 Screw	M3, 铁, 镍镀层
端 盖 Cover	无 盖
使用温度 Opeation Temperature	-40℃ ~ +105℃
额定负载 Rated Current	20A/300V
绝缘阻抗 Insulation Resistance	DC1000V 1000MΩ 以上
PCB 孔径 PCB Hole Dia	Φ1.9mm
接线容量 PCB Hole Dia	22~14AWG
额定力矩 Screw torque	7.0Lb*in
产品状态 Product Status	
外 形 图 Dimension	
	 Technical drawing showing dimensions for the BU8.255F/HR terminal block: - Top view: Overall length $L = 8.25 \times (P-1) + 10.15$, Pitch $A = 8.25 \times (P-1)$, individual pitch 8.25, and hole diameter $\phi 3.50$. - Side view: Mounting hole diameter $\phi 3.50$, overall height 5.40, and terminal height 1.10. - Cross-section view: Mounting hole diameter $\phi 3.50$, overall height 15.10, terminal height 0.80, and base thickness 3.00.