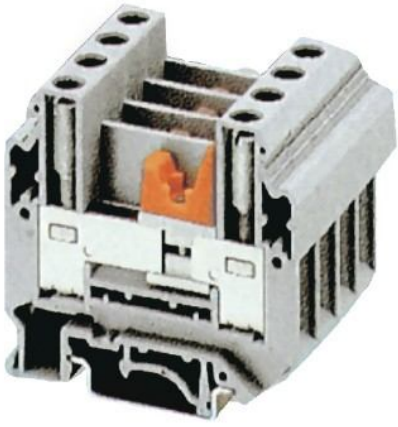






说明	简图	型号
端子: 带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal: with general-purpose mounting feet ,can be installed on tracks NS32 or NS35		JUT1-6S 厚/宽 高 8.2/72/51.5/56.5 Thickness/width Height 刚性导线(mm²) 柔性导线(mm²) I U Rigid cable Solf cable (A) (V) AWG:20-8 0.5-10 0.5-6 57 400 IEC 60947-7-1
1.端板 End plate		G-JUT1-6S
2. 中心联络件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘圈, 可分: 2-位,3-位,5-位,10-位。 Central adaptor. used at the center of terminal for transverse bridge connection, and screw head with insulated ring, which is dived into:2-digit, 3-digit, 5-digit, 10-digit,		JFB10-6S/S(短) JFB10-6S/L(长)
3.边插式联络件; 全绝缘 2 位; 全绝缘 3 位, 全绝缘 10 位。 Side adaptor;Full insulation in 2 digit. Full insulation in 3digit, full insulation 10 digit		JEB2-6 JEB3-6 JEB10-6
4. 分组隔片: 用于端子组间的视角及电气隔离。 Segment spacer; for visual and electric separation between neigh boring terminal groups.		JAP/6S
5. 测试插头: 与测试插座形成测试连接 Test plug: to form a testing connection by using test socket.		PS
6. 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles,with horizontal and vertical arrangements,ten spaced.		ZB8