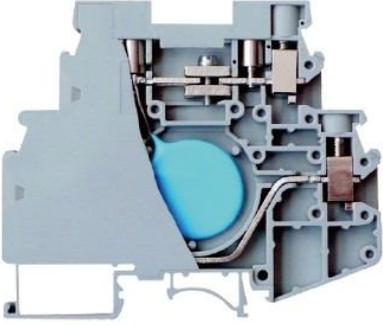


| 说明 | 简图 | 型号 | | | | | | | | | | | | |
|--|---|---|------------------------|------------------------|---|---|-------------|------------|-----|-----|----------|--------|-------|--------|
| <p>端子:带通用安装在 NS32 型,或 NS35 型导轨上。</p> <p>Terminal:with general-purpose mounting feet ,can be installed on tracks NS32 or NS35</p> |  | <p>JUT1-6G</p> <p>厚/宽 高 8.2/42.5/47/52</p> <p>Thickness/width Height</p> <table border="1"> <thead> <tr> <th>刚性导线(mm²)</th> <th>柔性导线(mm²)</th> <th>I</th> <th>U</th> </tr> <tr> <th>Rigid cable</th> <th>Soft cable</th> <th>(A)</th> <th>(V)</th> </tr> </thead> <tbody> <tr> <td>AWG:24-8</td> <td>0.2-10</td> <td>0.2-6</td> <td>57 690</td> </tr> </tbody> </table> <p>IEC 60947-7-1</p> | 刚性导线(mm ²) | 柔性导线(mm ²) | I | U | Rigid cable | Soft cable | (A) | (V) | AWG:24-8 | 0.2-10 | 0.2-6 | 57 690 |
| 刚性导线(mm ²) | 柔性导线(mm ²) | I | U | | | | | | | | | | | |
| Rigid cable | Soft cable | (A) | (V) | | | | | | | | | | | |
| AWG:24-8 | 0.2-10 | 0.2-6 | 57 690 | | | | | | | | | | | |