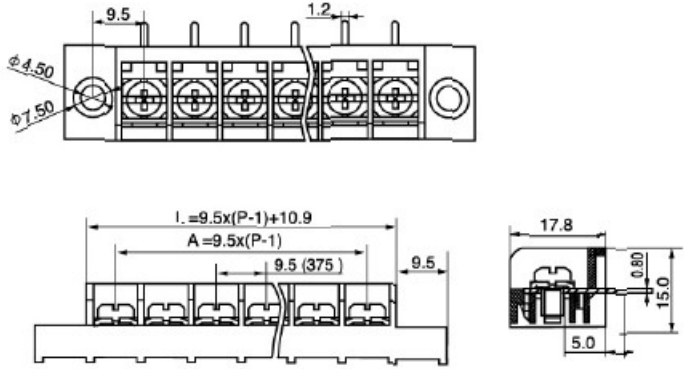


型 号 Model	BU9. 525TF/VB
间 距 Pitch	9.525mm
认 证 Approval	
产品规格 Specification	
绝缘外壳 Housing	PBT UL94 V-0
端 子 Terminal	黄铜、镀锡
螺 钉 Screw	M4, 铁, 镍镀层
端 盖 Cover	无 盖
使用温度 Opeation Temperature	-40℃~+105℃
额定负载 Rated Current	25A/300V
绝缘阻抗 Insulation Resistance	DC1000V 1000MΩ 以上
PCB 孔径 PCB Hole Dia	Φ2.0mm
接线容量 PCB Hole Dia	22~12AWG
额定力矩 Screw torque	10.6Lb*in
产品状态 Product Status	
外 形 图 Dimension	
	 Technical drawing showing dimensions for the BU9.525TF/VB terminal block: - Top view: Pitch = 9.5, Hole diameter = $\phi 4.50$, Overall width = $\phi 7.50$, Spacing between terminal groups = 1.2. - Side view: Total length $L = 9.5 \times (P-1) + 10.9$, Pitch $A = 9.5 \times (P-1)$, Spacing between terminal groups = 9.5 (375), Overall width = 9.5. - Cross-section: Overall height = 17.8, Mounting hole diameter = 5.0, Mounting hole offset = 0.80, Mounting hole depth = 15.0.