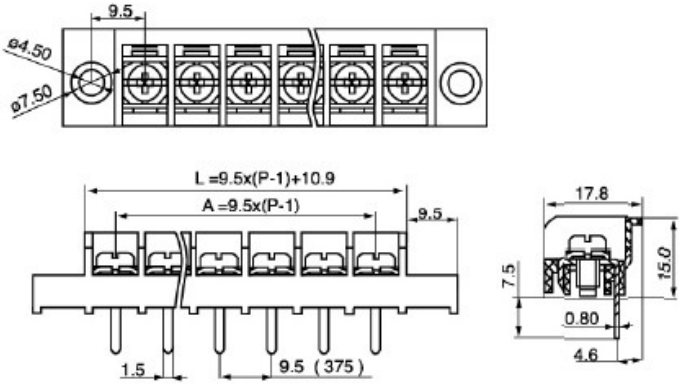


型 号 Model	BU9. 525TF/HR
间 距 Pitch	9.525mm
认 证 Approval	
产品规格 Specification	
绝缘外壳 Housing	PBT UL94 V-0
端 子 Terminal	黄铜、镀锡
螺 钉 Screw	M4，铁，镍镀层
端 盖 Cover	无 盖
使用温度 Opeation Temperature	-40℃～+105℃
额定负载 Rated Current	25A/300V
绝缘阻抗 Insulation Resistance	DC1000V 1000MΩ 以上
PCB 孔径 PCB Hole Dia	Φ2.0mm
接线容量 PCB Hole Dia	22～12AWG
额定力矩 Screw torque	10.6Lb*in
产品状态 Product Status	
外 形 图 Dimension	
	 Technical drawing showing dimensions (mm): - Top view: Pitch = 9.5, Overall length $L = 9.5 \times (P-1) + 10.9$, Overall width $A = 9.5 \times (P-1)$, Hole diameter $\phi 4.50$, Mounting hole diameter $\phi 7.50$. - Side view: Pitch = 9.5 (375), Mounting hole diameter $\phi 7.50$. - Cross-section: Overall height 15.0, Terminal height 7.5, Terminal width 4.6, Terminal thickness 0.80, Overall width 17.8.