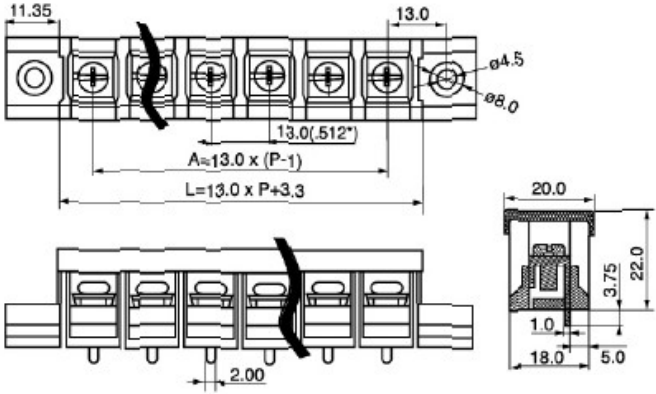


型 号 Model	BU13CF/HR
间 距 Pitch	13.0mm
认 证 Approval	
产品规格 Specification	
绝缘外壳 Housing	PBT UL94 V-0
端 子 Terminal	黄铜、镀锡
螺 钉 Screw	M4, 铁, 镍镀层
端 盖 Cover	有盖 (可供选择)
使用温度 Opeation Temperature	-40℃~+105℃
额定负载 Rated Current	40A/600V
绝缘阻抗 Insulation Resistance	DC1000V 1000MΩ 以上
PCB 孔径 PCB Hole Dia	Φ2.5mm
接线容量 PCB Hole Dia	18~10AWG
额定力矩 Screw torque	10.6Lb*in
产品状态 Product Status	
外形图 Dimension	
	 Technical drawing showing dimensions for the BU13CF/HR terminal block: - Top view: Overall length 11.35, pitch 13.0, hole diameter $\phi 4.5$, mounting hole diameter $\phi 8.0$. Pitch dimension is also given as 13.0(.512"). - Side view: Overall length $A \approx 13.0 \times (P-1)$, total length $L = 13.0 \times P + 3.3$, and a 2.00 dimension for the terminal spacing. - Cross-section: Overall width 20.0, mounting hole diameter $\phi 8.0$, terminal width 3.75, terminal height 22.0, and a 1.0 dimension for the terminal base.